

Apollo "E" Pager

Hospitality Series



"Your Source for Pagers"

Visit Our Website at:

www.WirelessMessaging.com



P/N= E-Pager

Perfect for Restaurants and Waiting Rooms, etc.


Key Features:

- Synthesized or Crystal Type
- Tone / Vibration / Flash Only
- Flash with 6 LED Alert
- One LED (Heartbeat, Alert, Out of Range and Low Battery)
- One "Push" Button to Turn Pager Off
- Hinged Belt-Clip
- Over-the-Air "Off"
- Option: Mercury Switch for Auto-Off
- Programmable Alert Type
- Programmed by PC Software
- "AAA" Alkaline Battery Acceptable
- Long Battery Life
- Option: Charging Tray (P/N= EPagerBase)

Specifications:

- Model: E-Pager
- Frequency: 408-473 MHz and 138-174 MHz
- Paging Sensitivity: 512bps - 5 μ V/M, 1200bps - 7 μ V/M, 2400bps - 9 μ V/M
- Pager Baud Rate: 512 / 1200 / 2400bps for POCSAG,
- Channel Spacing: 25 KHz Wide Band (WB)
- Code Format: POCSAG
- Spurious Rejection: 40db below carrier
- Alert Tone Loudness: 85db @ 10 cm
- Cap Codes: 4 Cap Codes for POCSAG
- Weight: Approx. 36.5 Grams (w/o Battery)
- Dimension: 41(L) x 60(W) x 29(H) mm
- Variety of Case Colors

NOTE: Frequency Required when Ordered

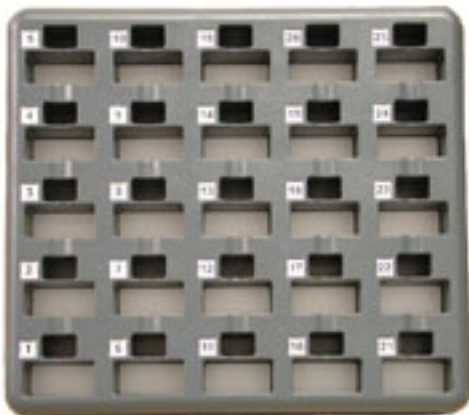

E-Pager Charging Tray (Optional)